



NOTES:
1. EXPANSION JOINTS SHALL BE PLACED AT A MAXIMUM OF 100FT O.C.
2. EXPANSION JOINTS SHALL BE PLACED A MAXIMUM OF 50 FT FROM BUILDING CORNERS
3. CONTRACTOR SHALL PROVIDE EOR/AOR WITH PLAN INDICATING PROPOSED EXPANSION JOINT LOCATIONS FOR FINAL APPROVAL

CONCRETE WALL EXPANSION JOINT DETAIL

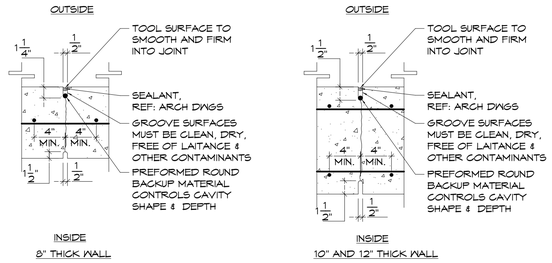


NOTES:
1. CONTROL JOINTS SHALL BE PROVIDED IN CONCRETE WALL CONSTRUCTION BY SAW-CUTTING JOINT IN WALL AS INDICATED.
2. CONTROL JOINTS SHALL BE SPACED EQUAL TO THE WALL HEIGHT WITH A MAXIMUM OF 25FT O.C. AND SHALL BE PROVIDED AT 15FT MAX. FROM WALL CORNERS.
3. COORDINATE JOINT LOCATION TO AVOID WALL VERTICAL REINFORCEMENT. MINIMUM 4" BETWEEN JOINT AND VERTICAL REINFORCEMENT.


CONCRETE WALL CONTROL JOINT DETAIL

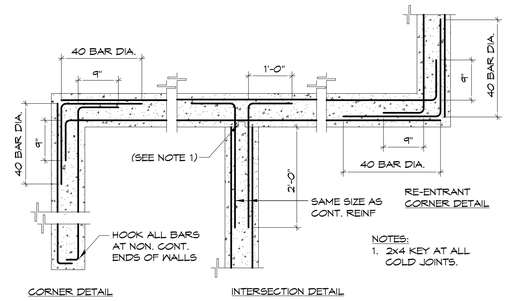

TYPICAL HORIZONTAL REINFORCEMENT DETAIL FOR CAST-IN-PLACE CONCRETE WALL

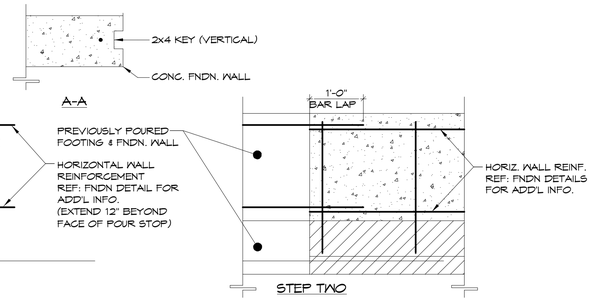


CONCRETE FOUNDATION WALL & STRIP FOOTING CONSTRUCTION JOINT DETAILS

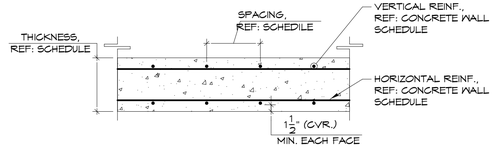


PLAN

TYPICAL CONCRETE WALL (VERTICAL SPANNING) (U.N.O.)

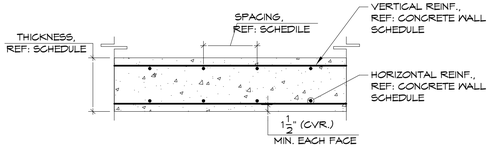


PLAN


TYPICAL CONCRETE WALL (HORIZONTAL SPANNING)

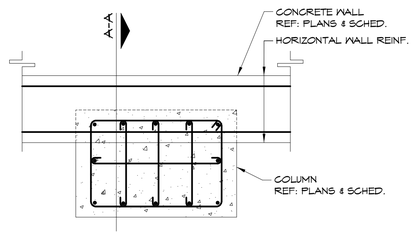

PLAN VIEW

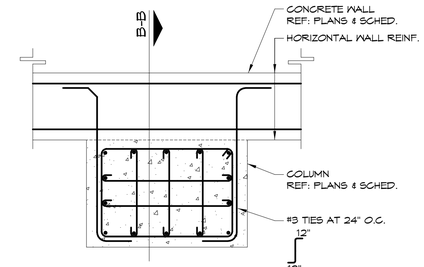


PLAN VIEW

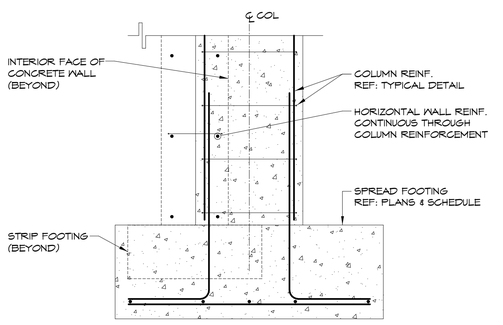

A-A

CONCRETE WALL W/ INTEGRATED CONCRETE COLUMN/PIER

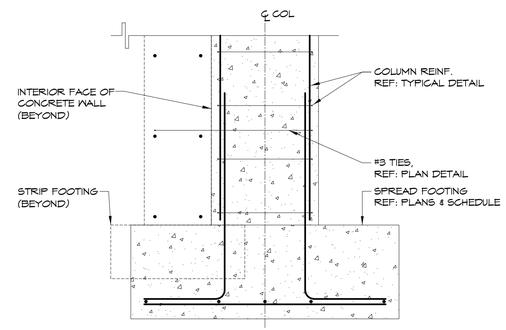

B-B

CONCRETE WALL W/ ADJACENT CONCRETE COLUMN/PIER

TYPICAL CONCRETE WALL CONSTRUCTION DETAIL

RISE | FL architecture

ARCHITECT:

NYC OFFICE:
241 37TH STREET, SUITE 440
BROOKLYN, NEW YORK 11232
JEFF AKERMAN, RA
JEFF@RISEARCHITECTURE.COM
516-249-3746

NJ OFFICE:
36 AIRPORT RD SUITE 402
LAKEWOOD, NJ 08701
SHIMON GREENBAUM, RA
SHIMON@RISEARCHITECTURE.COM
908-674-8717

FL OFFICE:
210 N UNIVERSITY DR SUITE 210
CORAL SPRINGS, FL 33071
SHIMON GREENBAUM, RA
SHIMON@RISEARCHITECTURE.COM
908-674-8717

STRUCTURAL CONSULTANT:
JT ENGINEERING
BUILDING SOLUTIONS
1321 BRUNSWICK AVE.
Lawrence, NJ 08648
P: 609.303.0236
F: 609.303.0237
www.jt-pe.com

MEP CONSULTANT:

CIVIL CONSULTANT:

REVISIONS:

NO.	DATE	DESCRIPTION
1	12/13/23	PERMIT

CLIENT:

PROJECT NAME / LOCATION:
Okeechobee (Mikvah)
FL-78 & Access Road
Okeechobee, Florida, 34978

DRAWING TITLE:
TYPICAL CONCRETE WALLS DETAILS

EXAMINER'S SIGNATURE:

PROFESSIONAL SEAL:
Jason Tarantino
Digitally signed by Jason Tarantino
Date: 2024.04.19 12:48:46 -04'00'
JASON C. TARANTINO
FL LIC. NO.
PE 94381

SCALE: AS NOTED
DATE:
PROJECT NO. 2318_06

DRAWING NO.
S516

BARCODE

THE GENERAL CONTRACTOR SHALL CHECK AND VERIFY ALL DIMENSIONS AND REPORT ALL ERRORS AND OMISSIONS TO THE ARCHITECTS. DO NOT SCALE DRAWING. THE DRAWING SHALL NOT BE USED UNTIL SIGNED BY CONSULTANTS.

12/19/2023 12:34:43 PM