


1A FLOOR PLAN
1/8" = 1'-0"

FLOOR PLAN


EARLY LEARNING CENTER | FAMILY PROMISE | aD# 25107 | 11/03/2026

FamilyPromise

arc DESIGN
architecture + interiors

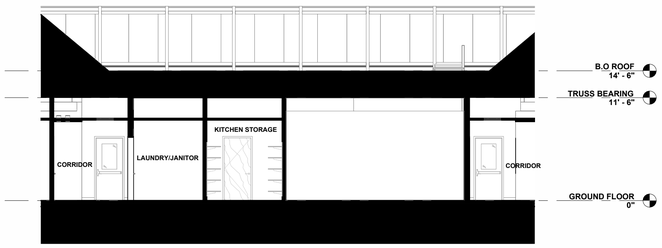

2B SECTION
1/8" = 1'-0"

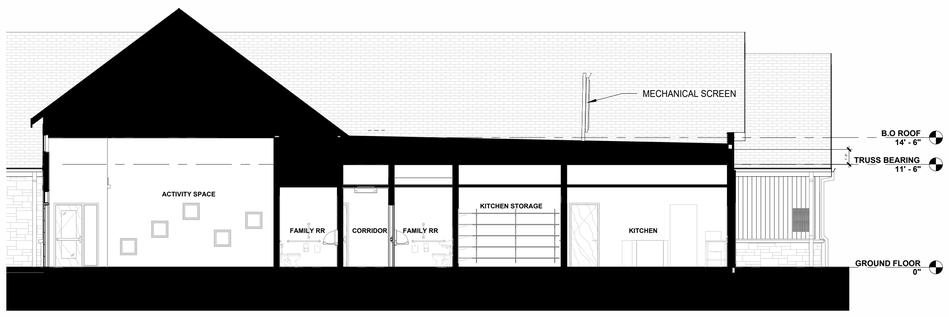

2A SECTION
1/8" = 1'-0"



1A ROOF PLAN
1/8" = 1'-0"

ROOF PLAN

EARLY LEARNING CENTER | FAMILY PROMISE | aD# 25107 | 11/03/2026

FamilyPromise

arc DESIGN
architecture + interiors

EXTERIOR MATERIAL TOTALS

MATERIALS	AREA	% OF NET*
GROSS AREA	10,231 SF	
NET* AREA	9,186 SF	
STONE VENEER	4,171 SF	45%
F.C. BOARD AND BATTEN	2,412 SF	26%
F.C. LAP SIDING (WOOD TONE)	386 SF	4%
F.C. LAP SIDING (BLUE)	2,204 SF	24%

*EXCLUDES ROOF FORMS, WINDOW, DOORS, AWNINGS, AND SIMILAR FEATURES

GLAZING	726 SF	7%**

**GLAZING PERCENTAGE IS TAKEN FROM THE GROSS SQUARE FOOTAGE

MATERIALS - EAST	AREA	% OF NET*
GROSS AREA	2,373 SF	
NET* AREA	2,131 SF	
STONE VENEER	957 SF	45%
F.C. BOARD AND BATTEN	609 SF	29%
F.C. LAP SIDING (WOOD TONE)	30 SF	1%
F.C. LAP SIDING (BLUE)	535 SF	25%
GLAZING	164 SF	7%**

MATERIAL - SOUTH	AREA	% OF NET*
GROSS AREA	3,416 SF	
NET* AREA	2,955 SF	
STONE VENEER	1,446 SF	49%
F.C. BOARD AND BATTEN	840 SF	28%
F.C. LAP SIDING (WOOD TONE)	194 SF	7%
F.C. LAP SIDING (BLUE)	475 SF	16%
GLAZING	431 SF	13%**

MATERIALS - WEST	AREA	% OF NET*
GROSS AREA	2,356 SF	
NET* AREA	2,100 SF	
STONE VENEER	1,025 SF	49%
F.C. BOARD AND BATTEN	512 SF	24%
F.C. LAP SIDING (WOOD TONE)	161 SF	8%
F.C. LAP SIDING (BLUE)	394 SF	19%
GLAZING	77 SF	3%**

MATERIALS - NORTH	AREA	% OF NET*
GROSS AREA	2,087 SF	
NET* AREA	2,000 SF	
STONE VENEER	743 SF	37%
F.C. BOARD AND BATTEN	451 SF	23%
F.C. LAP SIDING (WOOD TONE)	0 SF	0%
F.C. LAP SIDING (BLUE)	800 SF	40%
GLAZING	54 SF	3%**

EXTERIOR MATERIALS


STONE VENEER


BOARD AND BATTEN


FIBER CEMENT LAP SIDING


FIBER CEMENT LAP SIDING


FIBER CEMENT TRIM



FIBER CEMENT TRIM


ASPHALT SHINGLES



VINYL WINDOWS


GLAZING


HEAVY-TIMBER FRAME

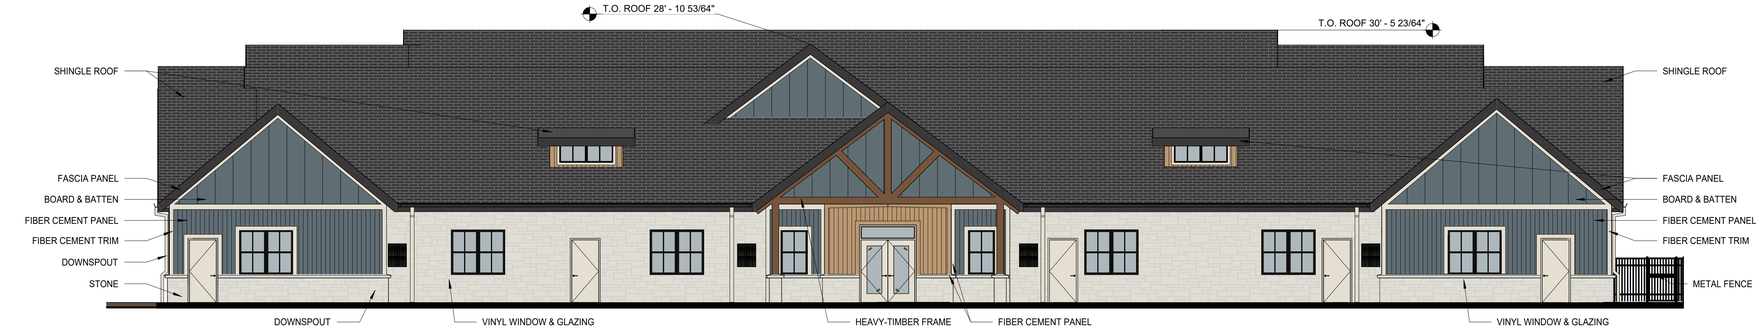

1D ELEVATION - WEST
1/8" = 1'-0"

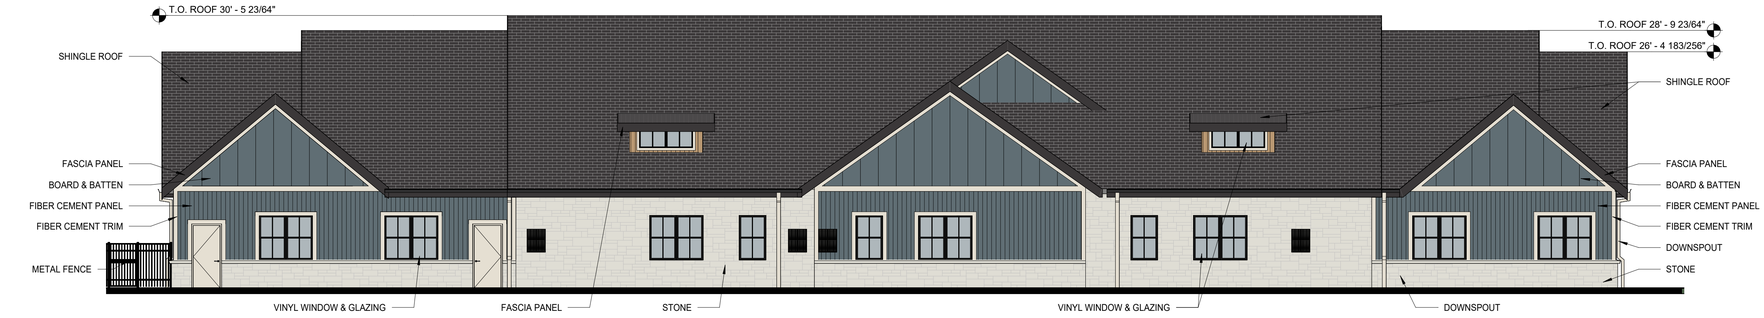

1C ELEVATION - EAST
1/8" = 1'-0"




2B ELEVATION - PLAYGROUND WEST
1/8" = 1'-0"



1B ELEVATION - SOUTH
1/8" = 1'-0"



2A ELEVATION - PLAYGROUND EAST
1/8" = 1'-0"

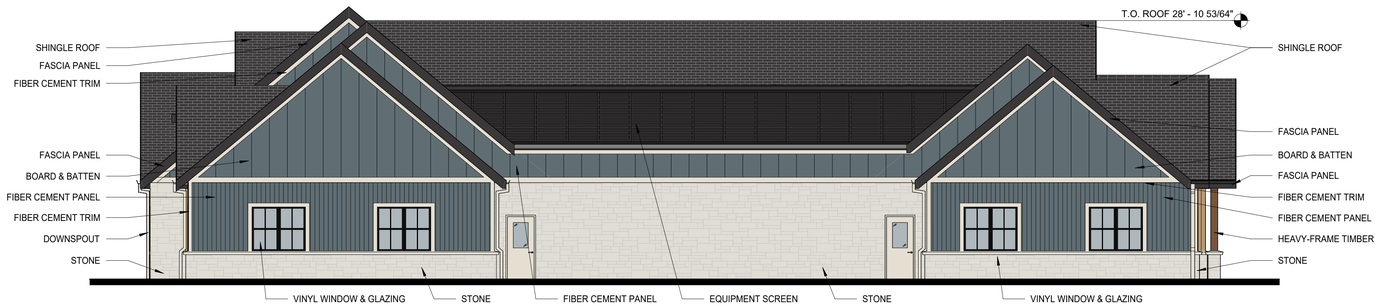

1A ELEVATION - NORTH
1/8" = 1'-0"

EXTERIOR ELEVATIONS

EARLY LEARNING CENTER | FAMILY PROMISE | aD# 25107 | 11/03/2026

FamilyPromise

arc DESIGN
architecture + interiors



EXT PERSPECTIVE - ENTRANCE




PERSPECTIVE ELEVATIONS



PERSPECTIVE ELEVATIONS



PERSPECTIVE ELEVATIONS

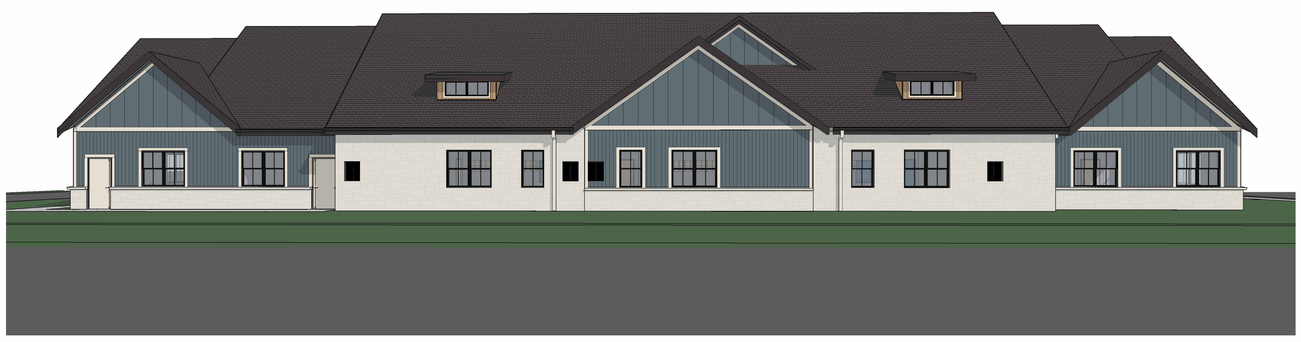


PERSPECTIVE ELEVATIONS

PERSPECTIVE ELEVATIONS

EARLY LEARNING CENTER | FAMILY PROMISE | aD# 25107 | 11/03/2026

FamilyPromise

arc DESIGN
architecture + interiors

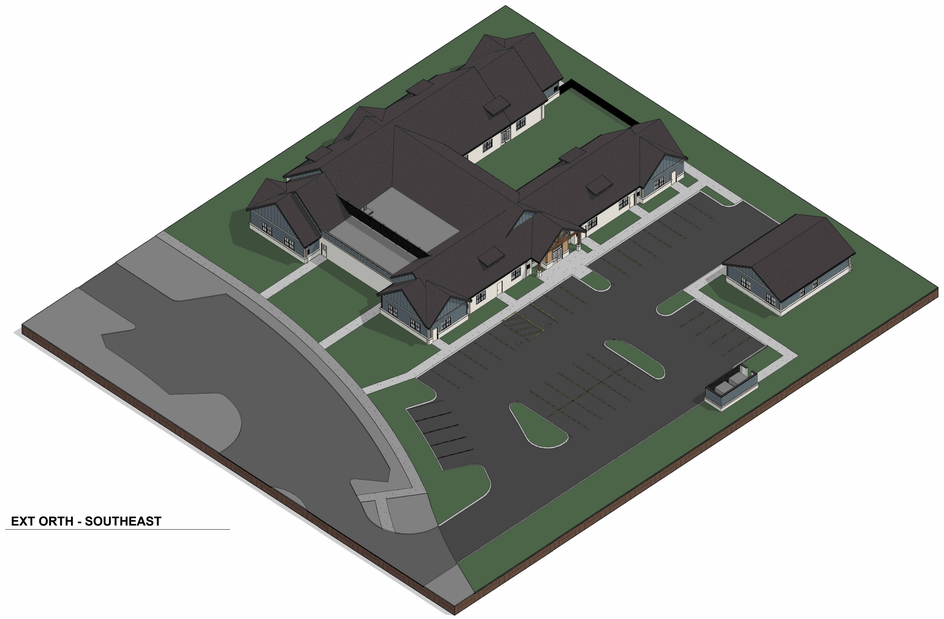

EXT ORTH - SOUTHEAST




3D RENDERING



3D RENDERING



3D RENDERING

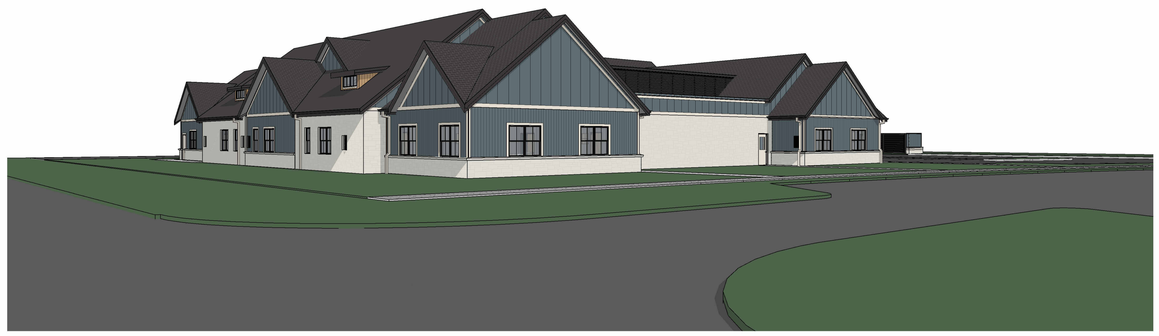

3D RENDERING

PERSPECTIVES

EARLY LEARNING CENTER | FAMILY PROMISE | aD# 25107 | 11/03/2026

FamilyPromise

arc DESIGN
architecture + interiors

STONE VENEER

BOARD AND BATTEN

FIBER CEMENT TRIM

FIBER CEMENT LAP SIDING

ASPHALT SHINGLES

VINYL WINDOWS

GLAZING

EXTERIOR MATERIALS

EXTERIOR MATERIAL TOTALS

MATERIALS	AREA	% OF NET*
GROSS AREA	1,940 SF	
NET* AREA	1,744 SF	
STONE VENEER	478 SF	27%
F.C. BOARD AND BATTEN	284 SF	16%
F.C. LAP SIDING (BLUE)	982 SF	56%
GLAZING	146 SF	6%

*EXCLUDES ROOF FORMS, WINDOW, DOORS, AWNINGS, AND SIMILAR FEATURES

GLAZING	146 SF	8%**


**GLAZING PERCENTAGE IS TAKEN FROM THE GROSS SQUARE FOOTAGE

MATERIALS - EAST	AREA	% OF NET*
GROSS AREA	548 SF	
NET* AREA	453 SF	
STONE VENEER	110 SF	24%
F.C. BOARD AND BATTEN	142 SF	32%
F.C. LAP SIDING (BLUE)	201 SF	44%
GLAZING	45 SF	8%**


MATERIAL - SOUTH	AREA	% OF NET*
GROSS AREA	473 SF	
NET* AREA	451 SF	
STONE VENEER	143 SF	32%
F.C. LAP SIDING (BLUE)	308 SF	68%
GLAZING	22 SF	5%**

MATERIALS - WEST	AREA	% OF NET*
GROSS AREA	497 SF	
NET* AREA	452 SF	
STONE VENEER	110 SF	24%
F.C. BOARD AND BATTEN	142 SF	32%
F.C. LAP SIDING (BLUE)	200 SF	44%
GLAZING	45 SF	9%**

MATERIALS - NORTH	AREA	% OF NET*
GROSS AREA	422 SF	
NET* AREA	388 SF	
STONE VENEER	115 SF	30%
F.C. LAP SIDING (BLUE)	273 SF	70%
GLAZING	34 SF	8%**

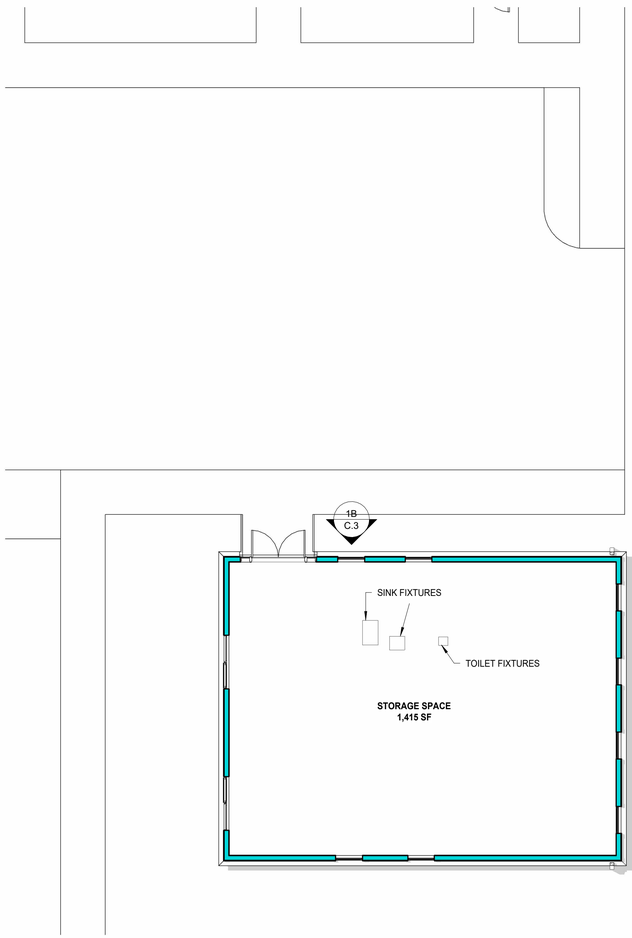

3A FLOOR PLAN
1/8" = 1'-0"

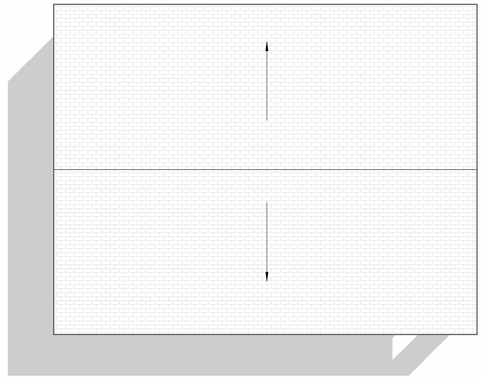


2C ROOF PLAN
1/8" = 1'-0"




EXT PERSPECTIVE




1D ELEVATION - SOUTH
1/8" = 1'-0"

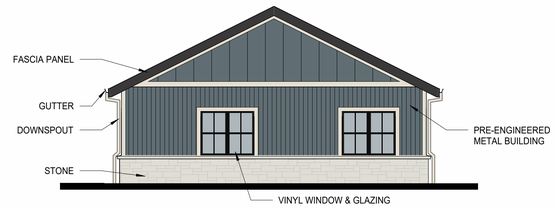

1C ELEVATION - NORTH
1/8" = 1'-0"

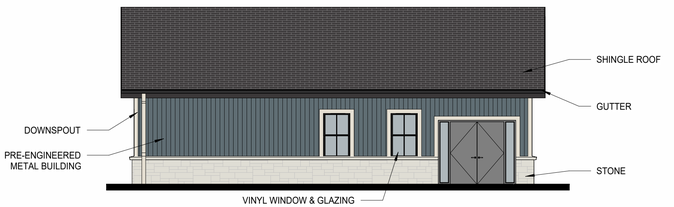

1B ELEVATION - EAST
1/8" = 1'-0"

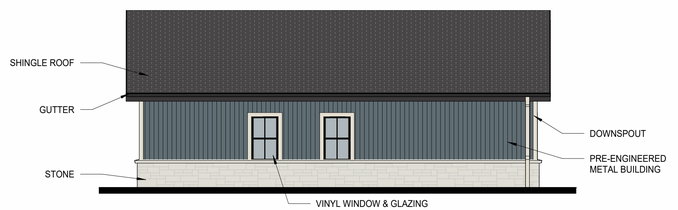

1A ELEVATION - WEST
1/8" = 1'-0"

STORAGE SPACE

EARLY LEARNING CENTER | FAMILY PROMISE | aD# 25107 | 11/03/2026

FamilyPromise

arc DESIGN
architecture + interiors



STONE VENEER




FIBER CEMENT LAP SIDING

EXTERIOR MATERIAL TOTALS

MATERIALS	AREA	% OF NET*
NET* AREA	340 SF	
STONE VENEER	116 SF	34%
F.C. LAP SIDING (BLUE)	224 SF	66%

*EXCLUDES ROOF FORMS, WINDOW, DOORS, AWNINGS, AND SIMILAR FEATURES


EXTERIOR MATERIALS - UTILITY ENCLOSURE

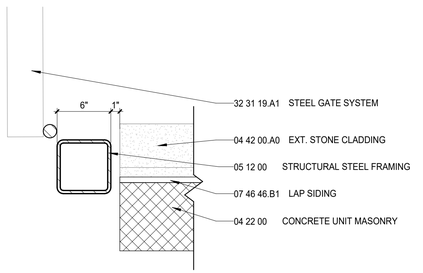


1C PLAN DETAIL
1 1/2" = 1'-0" REF: 1A / C.4




2B ELEVATION - EAST
1/4" = 1'-0"

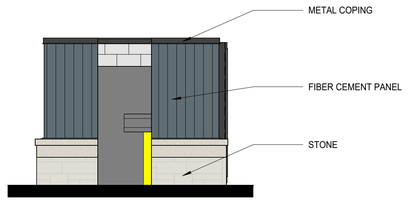


1B ELEVATION - SOUTH
1/4" = 1'-0"

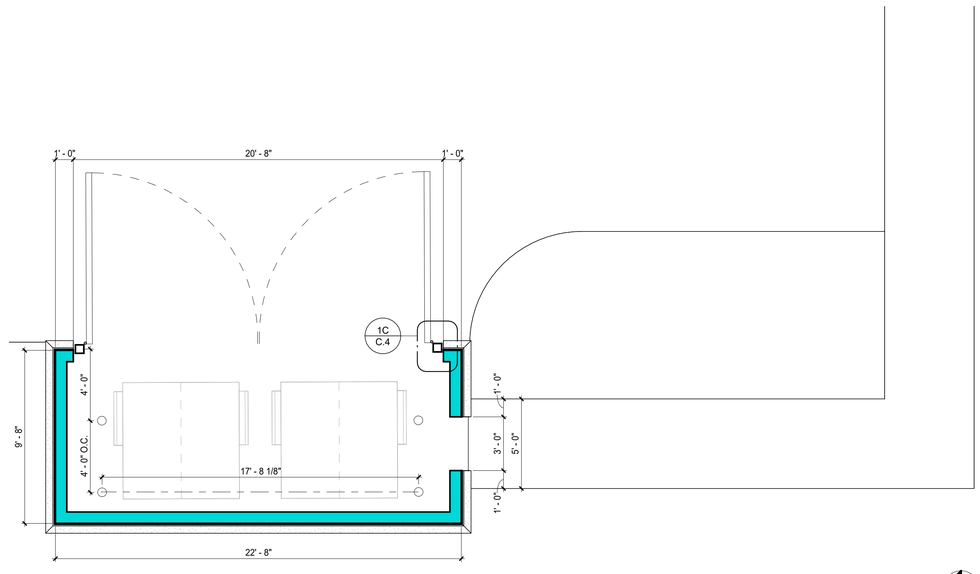

1A FLOOR PLAN
1/4" = 1'-0"

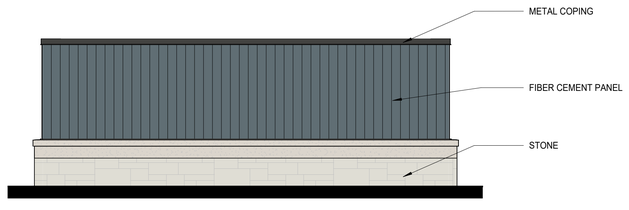

3A ELEVATION - WEST
1/4" = 1'-0"

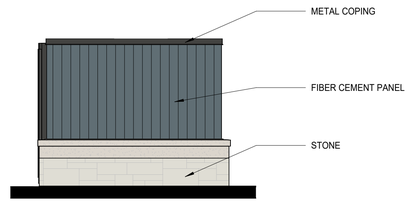

2A ELEVATION - NORTH
1/4" = 1'-0"

UTILITY ENCLOSURE

EARLY LEARNING CENTER | FAMILY PROMISE | aD# 25107 | 11/03/2026

FamilyPromise

arc DESIGN
architecture + interiors